




Product Specification

DMT Quartz Sand up to 150 my

TÜV NORD Systems GmbH &
Co. KG
Plant & Product Safety
Refrigeration & Air Quality

Am TÜV 1
45307 Essen, Germany

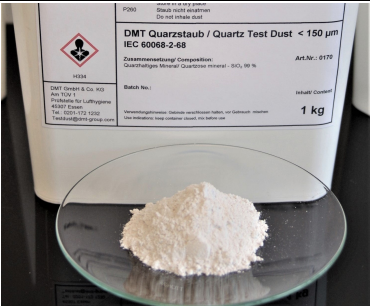

1. General description: Standard 60068-2-68 defines test procedures to determine the effects of dust and sand as an air component on electro technical products. DMT quartz dust < 150 µm is used for the Lc test according to methods Lc1 and Lc2.

2. Composition: The specified particle size distribution is shown in the following table:

| x (µm) | Q3(x) (%) |
|--------|--------------|
| 2.0 | 1.5 - 5.0 |
| 5.0 | 5.0 - 11.0 |
| 10.0 | 11.0 - 19.0 |
| 20.0 | 20.0 - 30.0 |
| 40.0 | 35.0 - 46.0 |
| 75.0 | 60.0 - 70.0 |
| 105.0 | 76.0 - 86.0 |
| 150.0 | 99.0 - 100.0 |

3. Transport and Storage: Partial segregation may occur during transport and storage. It is therefore recommended to homogenize the DMT Quartz Sand up to 150 my before use, which can be achieved by mixing with a laboratory tumbler mixer. Please store in a dry and airtight original container.



4. Quality ensurance: In order to achieve reproducible quality, the raw materials and production are strictly controlled. The following quality controls are carried out:

Monitoring the particle size distribution of raw materials

Monitoring the particle size distribution of the end product

5. Specification:

Name : DMT Quartz Sand up to 150 my

Standard: IEC 60068-2-68

Title of Standard: Environmental testing - Part 2-68: Tests - Test L: Dust and sand

Composition : Quarz

Material: Quartz

largest particle size (μm) : 150

Substance density (g/cm^3) : 2,65

Apperance : solid

Hardness (Mohs): 7,0

Colour : white
